

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

**(19) World Intellectual Property Organization  
International Bureau**



(43) International Publication Date  
3 June 2004 (03.06.2004)

PCT

(10) International Publication Number  
**WO 2004/047295 A1**

(51) International Patent Classification<sup>7</sup>: H03K 19/0175,  
19/003

**(74) Common Representative: KONINKLIJKE PHILIPS ELECTRONICS N.V.; c/o LESTER, Shannon, 1109 McKay Drive, M/S-41SJ, San Jose, CA 95131 (US).**

(21) International Application Number:  
PCT/IB2003/005178

**(22) International Filing Date:** 14 November 2003 (14.11.2003)

CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

**(25) Filing Language:** English

(84) Designated States (*regional*): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**(30) Priority Data:** 60/427,410 18 November 2002 (18.11.2002) US


**Declaration under Rule 4.17:**

(75) **Inventors/Applicants (for US only):** **DONALDSON, William** [GB/US]; 1109 McKay Drive, M/S-41SJ, San Jose, CA 95131 (US). **TOY, Edmond** [US/US]; 1109 McKay Drive, M/S-41SJ, San Jose, CA 95131 (US).

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES,*

[Continued on next page]

**(54) Title: INTEGRATED FLOATING POWER TRANSFER DEVICE WITH LOGIC LEVEL CONTROL AND METHOD**

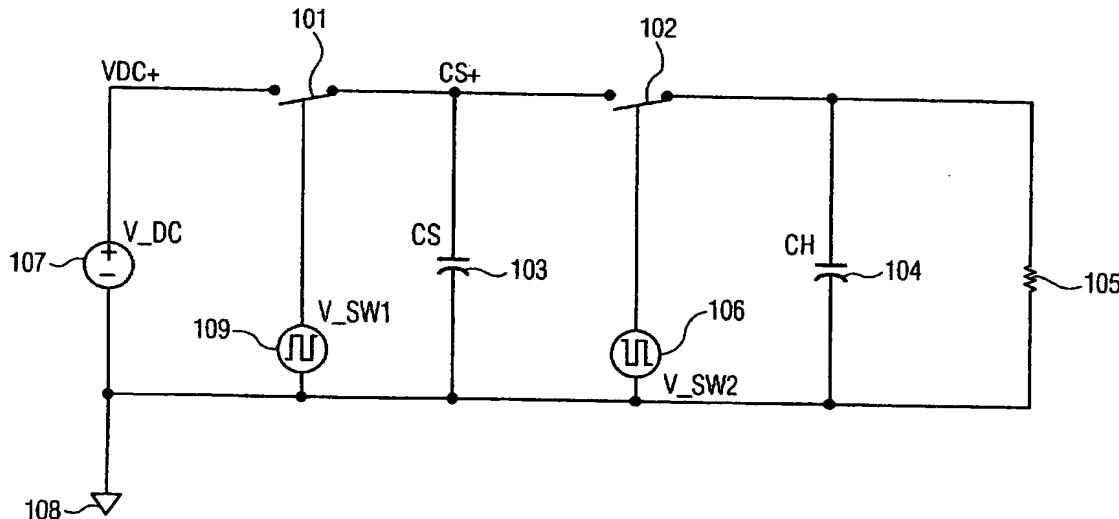

WO 2004/047295 A1

**(57) Abstract:** A switch control circuit (416, 402, 418, 422) and method are provided for transistor-implemented switches (405, 413, 408, 414) of an integrated floating power transfer device (400, 500). The device includes a floating bus (403, 410) driven by a power system which includes a charge pump circuit (419, 408, 414, 420). At least one switch circuit (405, 413) is coupled to the floating bus and the power system for facilitating charging of the floating bus. The switch control circuit (416, 402, 418, 422) includes a level shifting circuit (402) for adjusting a control signal to the at least one switch circuit notwithstanding floating of an input voltage signal thereto to facilitate operation of the switch circuit.